



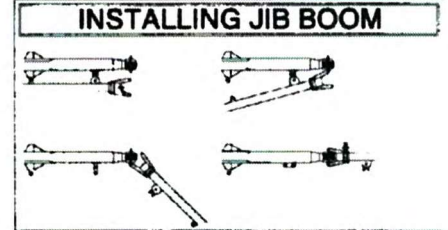




THE MARK OF QUALITY AND PERFORMANCE

**HYDRAULIC OIL**  
 FILL TO BOTTOM OF FILTER SCREEN. DO NOT OVERFILL. REFER TO SERVICE MANUAL FOR OIL & FILL INFORMATION.

**DIESEL FUEL ONLY**

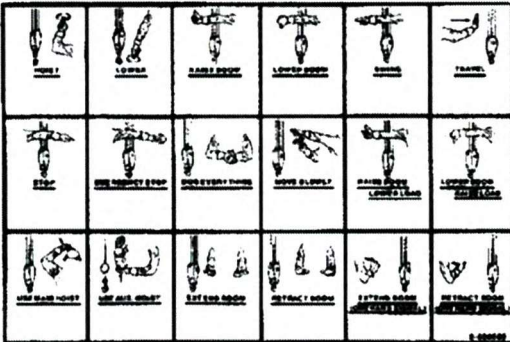

**LOAD CHART**

AFTER ADDING COOLANT, RUN ENGINE FOR 30 SECONDS AND RECHECK COOLANT LEVEL

**SHUTTLELIFT**

**SHUTTLELIFT**

**SHUTTLELIFT**

**7755 CARRYDECK**

19.5	31.0	43.0
55.0	67.0	

